

FORM PTO-1390 (Modified)  
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

212811US2PCT

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/926210

INTERNATIONAL APPLICATION NO.  
PCT/DE00/00819INTERNATIONAL FILING DATE  
16 MARCH 2000PRIORITY DATE CLAIMED  
26 MARCH 1999 (earliest)

TITLE OF INVENTION

METHOD AND DEVICE FOR ADJUSTING THE PHASE FOR FLAT SCREENS

APPLICANT(S) FOR DO/EO/US

Paul Von HASE

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☒ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

## Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Request for Consideration of Documents in International Search Report  
 Notice of Priority / Drawings (4 sheets)  
 Amended Sheets (pages 23, 24, 25, 26, 27, 28, 29 and 29a)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) <b>09/926210</b>		INTERNATIONAL APPLICATION NO. <b>PCT/DE00/00819</b>		ATTORNEY'S DOCKET NUMBER <b>212811US2PCT</b>	
--	--	--	--	---	--

24. The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :</b> <ul style="list-style-type: none"> <li><input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1000.00</b></li> <li><input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860.00</b></li> <li><input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710.00</b></li> <li><input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690.00</b></li> <li><input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b></li> </ul>				<b>CALCULATIONS PTO USE ONLY</b>	
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>\$860.00</b>	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				<b>\$130.00</b>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	35 - 20 =	15	x \$18.00	<b>\$270.00</b>	
Independent claims	2 - 3 =	0	x \$80.00	<b>\$0.00</b>	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$1,260.00</b>	
<input type="checkbox"/> Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				<b>\$0.00</b>	
<b>SUBTOTAL =</b>				<b>\$1,260.00</b>	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				<b>\$0.00</b>	
<b>TOTAL NATIONAL FEE =</b>				<b>\$1,260.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>TOTAL FEES ENCLOSED =</b>				<b>\$1,260.00</b>	
				Amount to be refunded	\$
				charged	\$

a. ☒ A check in the amount of **\$1,260.00** to cover the above fees is enclosed.


b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **15-0030** A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:



**22850**

**Surinder Sachar**  
Registration No. 34,423

(703) 413-3000

*Surinder Sachar*

SIGNATURE

**Marvin J. Spivak**

NAME

**24,913**

REGISTRATION NUMBER

**9-25-01**

DATE

09/926210

JC03 Rec'd PCT/PTO 25 SEP 2001

212811US-2 PCT

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF:

:

PAUL VON HASE

: ATTN: APPLICATION DIVISION

SERIAL NO: NEW U.S. PCT APPLN

:

(BASED ON PCT/DE00/00819)

FILED: HERewith

:

FOR: METHOD AND DEVICE FOR  
ADJUSTING THE PHASE FOR FLAT  
SCREENS

PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

Prior to a first examination on the merits, please amend the above-identified  
application as follows:

IN THE TITLE

Please cancel the original title and insert therefor:

METHOD AND DEVICE FOR ADJUSTING THE PHASE FOR FLAT SCREENS

IN THE CLAIMS

4. (Amended) A method according to claim 1, characterized in that the phase

adjustment necessary for the instantaneous condition of the system is determined only at individual image spots, and in that the determined phase adjustment is then applied to the entire image.

8. (Amended) A method according to claim 5, wherein the image area and image spots are arrayed on the flat-panel display in rows and columns between a back-porch region and a front-porch region, characterized in that an image spot in the first image column close to the back-porch region is chosen as the sufficiently bright image spot for determination of the rising edge and an image spot in the first image column close to the front-porch region is chosen as the sufficiently bright image spot for determination of the falling edge.

9. (Amended) A method according to claim 5, characterized in that the brightness of a plurality of image spots of the first or last image column is measured, and the image spots with the greatest brightness in the first or last image column are chosen for determination of the rising or falling edge respectively of the video pulse.

10. (Amended) A method according to claim 5, characterized in that the image spots  $(n \times k)$  are first measured with  $n = 1, 2, \dots N$  and  $k = \text{constant}$ , such as 10, and in that, if no sufficiently bright image spot was found, the image spots  $(n + m) \times k$  are measured with  $m = 1, 2, \dots N$ , until a sufficiently bright image spot is found.

11. (Amended) A method according to claim 5, characterized in that, for determination of the amplitude values of the selected image spots, the phases at these image spots are shifted until the measured amplitude values no longer change significantly, and in that the amplitude values then determined are further processed.

12. (Amended) A method according to claim 5, characterized in that the phase used for determination of the amplitude values is advanced sufficiently that the measured amplitude values are smaller than a predetermined limit value, for example smaller than 50% of the amplitude value, in that the phase is delayed by half the width of a spot, and in that the amplitude value then measured is further processed.

13. (Amended) A method according to claim 5, characterized in that, for determination of the rising edge of the selected image spots, the phase at the selected image spot is shifted sufficiently toward the back-porch region that the measured amplitude value is reduced to a predetermined percentage, for example 50%, of the previously determined amplitude value, and in that this value of the phase is stored temporarily as the position of the rising edge.

14. (Amended) A method according to claim 5, characterized in that, for determination of the falling edge of the selected image spots, the phase at the selected image spot is shifted sufficiently toward the front-porch region that the measured amplitude value is reduced to a predetermined percentage, for example 50%, of the previously determined amplitude value, and in that this value of the phase is stored temporarily as the position of the falling edge.

15. (Amended) A method according to claim 5, characterized in that the phase or sampling instant is delayed relative to the midpoint between the rising and falling edges by a predetermined amount, for example 10% of the width of the image spot.

16. (Amended) A method according to claim 1, characterized in that the pixel or pixels that is or are influenced or distorted by matching is or are masked by distortion-free image fragments from a video memory.

18. (Amended) A method according to claim 4, characterized in that the sampling instant can be changed by the user compared with the value determined during matching, in which case an offset adjusted in this way is taken into consideration during automatic matching.

21. (Amended) A device according to claim 19, characterized by an adjusting device for shifting the phase, comprising a circuit containing two PLL circuits, whose outputs can be adjusted independently of one another as regards their phase.

22. (Amended) A device according to claim 19, characterized by an adjusting device for shifting the phase, comprising a PLL circuit with two clock outputs, whose output clock signals can be adjusted independently of one another as regards their phase.

23. (Amended) A device according to claim 22, characterized in that the two outputs of the PLL circuit optionally deliver a sampling clock signal for matching and a sampling signal for the entire image.

25. (Amended) A device according to claim 19, characterized by a device by which the phase adjustment necessary for the instantaneous condition of the system is determined only at individual image spots, and by which the determined phase adjustment is then applied to the entire image.

26. (Amended) A device according to claim 19, characterized by a device which determines the rising edge of a video pulse of a sufficiently bright image spot, by a device

that determines the falling edge of the video pulse at a sufficiently bright image spot, and by an adjusting device with which the phase is adjusted such that the sampling instant is located at approximately the midpoint between the rising and the falling edges of a video pulse.

27. (Amended) A device according to claim 19, characterized by a device which determines the rising edge of a video pulse of a sufficiently bright image spot, and by an adjusting device with which the phase is adjusted such that the sampling instant is shifted by approximately half the width of an image spot toward the center of the pixel.

28. (Amended) A device according to claim 19, characterized by a device which determines the falling edge of a video pulse at a sufficiently bright image spot, and by an adjusting device with which the phase is adjusted such that the sampling instant is shifted by approximately half the width of an image spot toward the center of the pixel.

29. (Amended) A device according to claim 26, characterized by a PLL circuit which is programmed such that it oscillates at an integral multiple of the needed sampling frequency, and by a downstream frequency divider, which divides the sampling frequency of the PLL circuit by a factor  $n$ , wherein  $n$  sampling signals phase-shifted by  $1/n$  periods relative to one another can be generated.

31. (Amended) A device according to claim 19, characterized by a device for shifting the phase for determination of the sampling value of the image spot until the measured amplitude values no longer differ significantly, whereupon the sampling value determined then is further processed.

32. (Amended) A device according to claim 19, characterized by a device which advances the phase used for determination of the sampling value sufficiently that the

measured amplitude values are smaller than a predetermined limit value, such as smaller than 50% of the sampling value, and by a device which then retards the phase by half the width of an image spot, whereupon the sampling value measured then is further processed.

33. (Amended) A device according to claim 19, characterized by a device which shifts the phase for determination of the rising edge sufficiently far toward the back-porch region that the measured amplitude value decreases to a predetermined percentage, such as 50% of the previously determined amplitude value, whereupon this value of the phase is stored temporarily as the position of the rising edge.

34. (Amended) A device according to claim 19, characterized by a device which shifts the phase for determination of the falling edge sufficiently far toward the front-porch region that the measured amplitude value decreases to a predetermined percentage, such as 50% of the previously determined amplitude value, whereupon this value of the phase is stored temporarily as the position of the falling edge.

35. (Amended) A device according to claim 19, characterized by an adjusting device, by which the sampling instant can be changed by the user compared with the value determined during matching, in which case an offset adjusted in this way is taken into consideration during automatic matching.

#### IN THE ABSTRACT

Please amend the Abstract on page 30 as follows:



## ABSTRACT OF THE DISCLOSURE

A method and a device for correcting the phase between the pixel clock of a graphics card and the sampling clock of a flat-panel display with an analog interface in a system including a flat-panel display, graphics card, and computer. Automatic adjustment of the phase is performed repeatedly. In the process, the rising edge of a video pulse of a sufficiently bright image spot in the first image column close to the back-porch region is determined. The falling edge of a video pulse is determined at a sufficiently bright image spot in the last image column close to the front-porch region, and the phase is adjusted such that the sampling instant is situated approximately at the midpoint between the rising and falling edges of a video pulse.

## REMARKS

Favorable consideration of this application, as presently amended, is respectfully requested.

The present preliminary amendment is submitted to place the above-identified application in more proper format under United States practice.

By the present preliminary amendment the title has been amended to match that on the PCT publication.


The claims have been amended by the present response to no longer recite any improper multiple dependencies or reference numerals.

The Abstract has been amended by the present response to be in more proper format under United States practice.

The present application is believed to be in condition for a full and thorough examination on the merits. An early and favorable consideration of the present application is hereby respectfully requested.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.



Gregory J. Maier  
Attorney of Record  
Registration No. 25,599  
Surinder Sachar  
Registration No. 34,423



**22850**

(703) 413-3000  
Fax #: (703) 413-2220  
SNS/js

I:\atty\SNS\212811US-PR.wpd

212811US-2 PCT

**Marked-Up Copy**

Serial No: \_\_\_\_\_

Amendment Filed on: \_\_\_\_\_

9-25-01IN THE CLAIMS

4. (Amended) A method according to [one of claims 1 to 3] claim 1, characterized in that the phase adjustment necessary for the instantaneous condition of the system is determined only at individual image spots, and in that the determined phase adjustment is then applied to the entire image.

8. (Amended) A method according to [one of claims 5 to 7] claim 5, wherein the image area and image spots are arrayed on the flat-panel display in rows and columns between a back-porch region and a front-porch region, characterized in that an image spot in the first image column close to the back-porch region is chosen as the sufficiently bright image spot for determination of the rising edge and an image spot in the first image column close to the front-porch region is chosen as the sufficiently bright image spot for determination of the falling edge.

9. (Amended) A method according to [one of claims 5 to 8] claim 5, characterized in that the brightness of a plurality of image spots of the first or last image column is measured, and the image spots with the greatest brightness in the first or last image column are chosen for determination of the rising or falling edge respectively of the video pulse.

10. (Amended) A method according to [one of claims 5 to 8] claim 5, characterized in that the image spots ( $n \times k$ ) are first measured with  $n = 1, 2, \dots N$  and  $k = \text{constant}$ , such as 10, and in that, if no sufficiently bright image spot was found, the image spots  $(n + m) \times k$  are measured with  $m = 1, 2, \dots N$ , until a sufficiently bright image spot is found.

11. (Amended) A method according to [one of claims 5 to 8] claim 5, characterized in that, for determination of the amplitude values of the selected image spots, the phases at these image spots are shifted until the measured amplitude values no longer change significantly, and in that the amplitude values then determined are further processed.

12. (Amended) A method according to [one of claims 5 to 8] claim 5, characterized in that the phase used for determination of the amplitude values is advanced sufficiently that the measured amplitude values are smaller than a predetermined limit value, for example smaller than 50% of the amplitude value, in that the phase is delayed by half the width of a spot, and in that the amplitude value then measured is further processed.

13. (Amended) A method according to [one of claims 5 to 8] claim 5, characterized in that, for determination of the rising edge of the selected image spots, the phase at the selected image spot is shifted sufficiently toward the back-porch region that the measured amplitude value is reduced to a predetermined percentage, for example 50%, of the previously determined amplitude value, and in that this value of the phase is stored temporarily as the position of the rising edge.

14. (Amended) A method according to [one of claims 5 to 8] claim 5, characterized in that, for determination of the falling edge of the selected image spots, the phase at the selected image spot is shifted sufficiently toward the front-porch region that the measured

amplitude value is reduced to a predetermined percentage, for example 50%, of the previously determined amplitude value, and in that this value of the phase is stored temporarily as the position of the falling edge.

15. (Amended) A method according to [one of claims 5 to 8] claim 5, characterized in that the phase or sampling instant is delayed relative to the midpoint between the rising and falling edges by a predetermined amount, for example 10% of the width of the image spot.

16. (Amended) A method according to [one of the preceding claims] claim 1, characterized in that the pixel or pixels that is or are influenced or distorted by matching is or are masked by distortion-free image fragments from a video memory.

18. (Amended) A method according to [one of claims 4 to 17] claim 4, characterized in that the sampling instant can be changed by the user compared with the value determined during matching, in which case an offset adjusted in this way is taken into consideration during automatic matching.

21. (Amended) A device according to claim 19 [or 20], characterized by an adjusting device for shifting the phase, comprising a circuit containing two PLL circuits [(PLL1, PLL2)], whose outputs [(A1, A2)] can be adjusted independently of one another as regards their phase.

22. (Amended) A device according to claim 19 [or 20], characterized by an adjusting device for shifting the phase, comprising a PLL circuit [(PLL)] with two clock outputs [(A1, A2)], whose output clock signals can be adjusted independently of one another as regards their phase.

23. (Amended) A device according to claim 22, characterized in that the two outputs [(A1, A2)] of the PLL circuit [(PLL)] optionally deliver a sampling clock signal for matching and a sampling signal for the entire image.

25. (Amended) A device according to [one of claims 19 to 25] claim 19, characterized by a device by which the phase adjustment necessary for the instantaneous condition of the system is determined only at individual image spots, and by which the determined phase adjustment is then applied to the entire image.

26. (Amended) A device according to [one of claims 19 to 25] claim 19, characterized by a device which determines the rising edge of a video pulse of a sufficiently bright image spot, by a device that determines the falling edge of the video pulse at a sufficiently bright image spot, and by an adjusting device with which the phase is adjusted such that the sampling instant is located at approximately the midpoint between the rising and the falling edges of a video pulse.

27. (Amended) A device according to [one of claims 19 to 26] claim 19, characterized by a device which determines the rising edge of a video pulse of a sufficiently bright image spot, and by an adjusting device with which the phase is adjusted such that the sampling instant is shifted by approximately half the width of an image spot toward the center of the pixel.

28. (Amended) A device according to [one of claims 19 to 26] claim 19, characterized by a device which determines the falling edge of a video pulse at a sufficiently bright image spot, and by an adjusting device with which the phase is adjusted such that the

sampling instant is shifted by approximately half the width of an image spot toward the center of the pixel.

29. (Amended) A device according to [one of claims 26 to 28] claim 26, characterized by a PLL circuit which is programmed such that it oscillates at an integral multiple of the needed sampling frequency, and by a downstream frequency divider, which divides the sampling frequency of the PLL circuit by a factor  $n$ , wherein  $n$  sampling signals phase-shifted by  $1/n$  periods relative to one another can be generated.

31. (Amended) A device according to [one of claims 19 to 26] claim 19, characterized by a device for shifting the phase for determination of the sampling value of the image spot until the measured amplitude values no longer differ significantly, whereupon the sampling value determined then is further processed.

32. (Amended) A device according to [one of claims 19 to 26] claim 19, characterized by a device which advances the phase used for determination of the sampling value sufficiently that the measured amplitude values are smaller than a predetermined limit value, such as smaller than 50% of the sampling value, and by a device which then retards the phase by half the width of an image spot, whereupon the sampling value measured then is further processed.

33. (Amended) A device according to [one of claims 19 to 26] claim 19, characterized by a device which shifts the phase for determination of the rising edge sufficiently far toward the back-porch region that the measured amplitude value decreases to a predetermined percentage, such as 50% of the previously determined amplitude value, whereupon this value of the phase is stored temporarily as the position of the rising edge.

34. (Amended) A device according to [one of claims 19 to 26] claim 19, characterized by a device which shifts the phase for determination of the falling edge sufficiently far toward the front-porch region that the measured amplitude value decreases to a predetermined percentage, such as 50% of the previously determined amplitude value, whereupon this value of the phase is stored temporarily as the position of the falling edge.

35. (Amended) A device according to [one of claims 19 to 34] claim 19, characterized by an adjusting device, by which the sampling instant can be changed by the user compared with the value determined during matching, in which case an offset adjusted in this way is taken into consideration during automatic matching.

#### IN THE ABSTRACT

Please amend the Abstract on page 30 as follows:

[Abstract]

[Method and device for correcting the phase in flat-panel displays]

#### ABSTRACT OF THE DISCLOSURE

[The invention relates to a] A method and a device for correcting the phase between the pixel clock of a graphics card and the sampling clock of a flat-panel display with an analog interface in a system [comprising] including a flat-panel display, graphics card, and computer. Automatic adjustment of the phase is performed repeatedly. In the process, the rising edge of a video pulse of a sufficiently bright image spot in the first image column close to the back-porch region is determined. The falling edge of a video pulse is determined at a sufficiently bright image spot in the last image column close to the front-porch region, and



the phase is adjusted such that the sampling instant is situated approximately at the midpoint between the rising and falling edges of a video pulse.

[Fig. 1]

IN THE TITLE

Please cancel the original title and insert therefor:

--METHOD AND DEVICE FOR ADJUSTING THE PHASE FOR FLAT SCREENS--

4/PR5

09/926210  
JC03 Rec'd FCT/PTO 25 SEP 2001

## Specification

Method and device for correcting the phase in flat-panel displays

The invention relates to a method and a device for correcting the phase between the pixel clock of a graphics card and the sampling clock of a flat-panel display with an analog interface in a system comprising flat-panel display, graphics card and computer.

Flat-panel displays with an analog interface must be adapted to the graphics card of the connected computer. If phase or sampling frequency is incorrectly adjusted, the image appears fuzzy and contains interferences. Whereas the values for image location, or in other words right-left and top-bottom adjustment, and for sampling frequency can be defined as preadjusted values in the case of standard modes, this is not possible for the phase, since the phase depends on the graphics card used and also on the video circuit.

Prior art flat-panel displays are usually provided with a microprocessor, which is responsible for general control of the flat-panel display. This microprocessor is configured such that it can also recognize the video mode adjusted on the computer. If the mode has already been adjusted at the factory or by the user, the flat-panel display is operated with the stored adjustments for image location, sampling frequency and phase. On the other hand, if the mode is one which has not yet been implemented in the microprocessor of the flat-panel display, standard values are assumed for image location, sampling frequency and phase. These standard values are not satisfactory in all cases.

The adjustment of the sampling clock and of the phase have a direct effect on image quality. An optimal sampling frequency is

achieved when the sampling of all pixels, in one line of a video signal, for example, takes place in a stable or characteristic region of these pixels, such as at the center of each pixel. Data conversion then yields optimal results. The displayed image does not contain any interferences, and is stable. In other words, the optimal sampling frequency is equal to the pixel frequency. If an incorrect sampling frequency has been adjusted, for example if the sampling clock is too fast compared with the pixel clock, the pixels are sampled at first in the permissible region, or in other words at the midpoint between two edges, but the subsequent pixels are sampled progressively more toward one edge, until even the region between two pixels is sampled, which obviously leads to unsatisfactory image quality. Incorrect sampling values are derived from the region in which the pixels are not sampled in an optimal, characteristic region. The image then exhibits strong vertical interference. The number of regions with vertical interference that are visible on the monitor increases as the difference between the frequencies of the sampling clock and the pixel clock becomes larger.

Even in the cases in which the sampling clock is identical to the pixel clock, however, the image quality can suffer if the phase has not been adjusted correctly. The reason is that sampling takes place in a pixel region that is not ideally suitable for sampling, for example too close to the leading or trailing edge of a pixel. This problem can be solved by shifting the phase, or in other words the sampling instant, as the whole until sampling takes place in a characteristic or permissible region of the pixels. If the phase has not been adjusted correctly, the image quality is impaired by noise signals over the entire monitor.

Flat-panel displays with analog interfaces, in which phase adjustment is automatically performed, are already known. For

such automatic phase-position adjustment, special test patterns with alternating white and black image spots are usually necessary, and the test pattern must be displayed by the graphics card. This has the disadvantage that software must be installed and started on the computer, and furthermore that this software must be available for all common operating systems.

For satisfactory operation of the flat-panel display, it is also desired that the phase adjustment be stable even over the long term. Among analog interfaces, it is known that the analog interface is not 100% stable. For example, run times and other characteristics vary with temperature. This instability of the analog interface also affects the image quality of the flat-panel display. In other words, even if the sampling phase is correctly adjusted when the computer is turned on, after a certain time, such as 30 minutes, the phase had undergone a drift, which then leads to a reduction of image quality and also, in many cases, to questions via the supplier's hotline.

In this regard, the object of the invention is to provide a method and a device for correcting the phase in flat-panel displays, whereby a continuously correct adjustment of the phase is possible.

To achieve this object, the inventive method is characterized in that automatic adjustment of the phase is performed repeatedly. For this purpose, continuous or periodic adjustment of the phase is preferred. In other words, the phase is repeatedly corrected either continuously or periodically during operation of the flat-panel display, thus compensating for drift due to temperature fluctuations or other influences on the flat-panel display. Thus the flat-panel display is always available with optimal image quality.

According to an advantageous embodiment of the inventive method, the phase adjustment necessary for the instantaneous condition of the system is determined only at individual image spots, and the determined phase adjustment is then applied to the entire image. In order to determine the phase adjustment suitable for the instantaneous condition of the system, the phase must be adjustable. Thus, if such an adjustment is to be performed during operation of the flat-panel display, the flat-panel display would be temporarily unavailable during the phase adjustment. If the phase shift necessary for the phase adjustment takes place only at individual image spots, however, the image is temporarily distorted only at these individual image spots, and this is not at all perceptible in practice. With this embodiment of the inventive method, therefore, the phase can be corrected during operation of the flat-panel display.

A further advantageous embodiment of the inventive method is characterized in that the pixel or pixels that is or are influenced or distorted by matching is or are masked by distortion-free image fragments from a video memory. In this way the influence of matching on image quality is further reduced.

A further advantageous embodiment of the inventive method is characterized in that the video memory is repeatedly regenerated, preferably after every second image, in order to avoid relatively large deviations between the current image and the image in the video memory, which is supposed to replace partial zones of the current image.

A further advantageous embodiment of the inventive method is characterized in that a sufficiently bright image spot is selected and the rising edge of a video pulse of this image spot is determined, in that a sufficiently bright image spot is

selected and the rising edge of a video pulse of this image spot is determined, and in that the phase is adjusted such that the sampling instant for the entire image is situated approximately at the midpoint between the rising and falling edges of the video pulse.

An advantageous embodiment of the inventive method is characterized in that the rising edge of a video pulse of a sufficiently bright image spot is determined, and in that the phase is adjusted such that the sampling instant is shifted by approximately half the width of an image spot toward the center of the pixel.

An advantageous embodiment of the inventive method is characterized in that the falling edge of the video pulse is determined at a sufficiently bright image spot, and in that the phase is adjusted such that the sampling instant is shifted by approximately half the width of an image spot toward the center of the pixel.

Whereas the image-location and sampling frequencies can be determined and correspondingly adjusted relatively simply by an algorithm, the phase position is more difficult to determine. The last three of the foregoing practical examples of the inventive method are simple and satisfactory methods for adjusting the phases, especially since no test patterns and no corresponding software are necessary in order to undertake automatic phase adjustment.

An advantageous embodiment of the inventive method, wherein the image area and image spots are arrayed on the flat-panel display in rows and columns between a back-porch region and a front-porch region, is characterized in that an image spot in the first image

column close to the back-porch region is chosen as the sufficiently bright image spot for determination of the rising edge and an image spot in the first image column close to the front-porch region is chosen as the sufficiently bright image spot for determination of the falling edge. The method can be performed particularly well if the most pronounced possible edges are evaluated or if regions or spots disposed next to one another have very different brightness. Thus a spot in the first or last image column is particularly suitable, since it completely satisfies the required conditions in combination with the front-porch or back-porch region respectively, and can be found with relatively little difficulty.

An advantageous embodiment of the inventive method is characterized in that the brightness of a plurality of image spots of the first or last image column is measured, and the image spots with the greatest or sufficient brightness in the first or last image column are chosen for determination of the rising or falling edge respectively of the video pulse. In this way it is ensured that image spots with sufficiently pronounced edges are used for the measurement.

An advantageous embodiment of the inventive method is characterized in that the image spots ( $n \times k$ ) are first measured with  $n = 1, 2, \dots N$  and  $k = \text{constant}$ , such as 10, and in that, if no sufficiently bright image spot was found, the image spots  $(n + m) \times k$  are measured with  $m = 1, 2, \dots N$ , until a sufficiently bright image spot is found. Thereby a search for suitable image spots is performed efficiently and in the shortest time.

An advantageous embodiment of the inventive method is characterized in that, for determination of the amplitude values of the selected image spots, the phases at these image spots are

shifted until the measured amplitude values no longer change significantly, and in that the amplitude values then determined are further processed.

Alternatively, an advantageous embodiment of the inventive method is characterized in that the phase used for determination of the amplitude value is advanced sufficiently that the measured amplitude values are smaller than a predetermined limit value, for example smaller than 50% of the amplitude value, in that the phase is delayed by half the width of a spot, and in that the amplitude value then measured is further processed.

The last two of the foregoing embodiments of the inventive method are simple solutions in order to determine the brightness of the image spot as a prerequisite for determination of the position of the rising and falling edge of the image spot.

A further advantageous embodiment of the invention is characterized in that, for determination of the rising edge of the selected image spots, the phase at the selected image spot is shifted sufficiently toward the back-porch region that the measured amplitude value is reduced to a predetermined percentage, for example 50%, of the previously determined amplitude value, and in that this value of the phase is stored temporarily as the position of the rising edge. Yet another advantageous embodiment of the invention is characterized in that, for determination of the falling edge of the selected image spots, the phase at the selected image spot is shifted sufficiently toward the front-porch region that the measured amplitude value is reduced to a predetermined percentage, for example 50%, of the previously determined amplitude value, and in that this value of the phase is stored temporarily as the position of the falling edge. In this way the rising and falling edges of two image spots are determined in simple manner, and the phase can then be adjusted such that it is located between the



rising and falling edges at approximately the center of an image spot.

A further advantageous embodiment of the invention is characterized in that the phase or sampling instant is delayed relative to the midpoint between the rising and falling edges by a predetermined amount, for example 10% of the width of the image spot. This is advantageous in particular for rapid video signals with overshoots, since it prevents sampling from taking place in the region of the overshoot.

A further advantageous embodiment of the inventive method is characterized in that the sampling instant can be changed by the user compared with the value determined during matching, in which case an offset adjusted in this way is taken into consideration during automatic matching. Thus, depending on the graphics card being used, the sampling instant can be advantageously advanced or retarded slightly relative to the value determined by matching. The offset can be adjusted, for example, via the OSD.

To achieve the object cited hereinabove, the device for correcting the phase between the pixel clock of a graphics card and the sampling clock of a flat-panel display having an analog interface in a system comprising a flat-panel display, graphics card and computer, is characterized by a device by which automatic adjustment of the phase is performed repeatedly, preferably continuously or periodically.

An advantageous embodiment of the inventive device is characterized by an adjusting device for shifting the phase, comprising a circuit containing two PLL circuits, whose outputs can be adjusted independently of one another as regards their phase.

A further advantageous embodiment of the inventive device is characterized by an adjusting device for shifting the phase, comprising a PLL circuit with two clock outputs, whose output clock signals can be adjusted independently of one another as regards their phase.

The last two of the foregoing advantageous embodiments of the inventive device have the advantage that the phase can be shifted within a single clock pulse in simple manner. By changing over between the two digital clock outputs of the PLL circuit, it is possible, since transients are absent, to switch forward and back without delay between the already adjusted phase positions of the second outputs.

A further advantageous embodiment of the inventive device is characterized in that the two outputs of the PLL circuit optionally deliver a sampling clock signal for matching and a clock signal for the entire image. Thereby the need to receive the phase is advantageously eliminated. An electronic changeover unit can then decide simply which output is responsible at which instant for which sampling signal.

A further advantageous embodiment of the inventive device is characterized in that the sampling clock is delivered alternately by the two outputs of the PLL circuit.

A further advantageous embodiment of the inventive device is characterized by a PLL circuit which is programmed such that it oscillates at an integral multiple of the needed sampling frequency, and by a downstream frequency divider, which divides the sampling frequency of the PLL circuit by a factor  $n$ , wherein  $n$  sampling signals phase-shifted by  $1/n$  periods relative to one another can be generated. In this case it is further advantageous for the factor  $n = 2$  to be used and, when the phase of the PLL circuit is adjusted such that the one sampling signal is in phase

with one edge of the pixel, the other sampling signal is phase-shifted by  $1/2$  pixel. As will be explained hereinafter, this is then the ideal sampling point for sampling the pixel. The circuit necessary for this purpose is simple and inexpensive.

A further advantageous embodiment of the inventive device is characterized by a device which determines the rising edge of a video pulse of a sufficiently bright image spot, a device that determines the falling edge of the video pulse at a sufficiently bright image spot, and an adjusting device with which the phase is adjusted such that the sampling instant is located at approximately the midpoint between the rising and the falling edges of a video pulse.

Further advantageous embodiments of the inventive method and of the inventive device are evident from the remaining dependent claims.

Practical examples of the invention will be described hereinafter with reference to the attached drawings, wherein:

- Fig. 1 shows a control circuit for a flat-panel display that can be connected via an analog interface;
- Fig. 2 schematically shows a horizontal synchronization signal and a channel of a video signal, such as the R video signal (R = red color);
- Fig. 3 schematically shows the horizontal synchronization signal and several lines of a channel of a video signal;
- Figs. 4A and 4B show schematic representations of video signals;
- Fig. 5 shows a schematic representation of the rising and falling edges of image spots of a video signal; and

Figs. 6A and 6B schematically show two ideal video signals and the effect of the position of the sampling pulse in relation to the video signal;

Fig. 7 shows a block diagram of a PLL circuit; and

Fig. 8 shows a block diagram of a further PLL circuit.

Fig. 1 shows a control circuit for a flat-panel display, which can be connected via an analog interface, and whose function will be explained in more detail hereinafter with reference to the various input signals and their conditioning. At the input of the control circuit there are applied on the one hand the video signal comprising the three color signals R, G, B, and on the other hand the two synchronization signals H-sync and V-sync for horizontal and vertical image synchronization. H-sync and V-sync are transmitted digitally, with signal voltages of 0 V and  $> 3$  V respectively. V-sync signals that the first line of an image is being transmitted. This signal therefore corresponds to the image refresh frequency and is typically in the range between 60 and 85 Hz. H-sync signals that a new image line is being transmitted. This signal corresponds to the line frequency and is usually around 60 kHz.

The video signal made up of the color signals R, G, B is an analog signal. The signal voltage ranges from 0 V to 0.7 V. The pixel clock, or in other words the frequency with which the value of this voltage can change, is 80 MHz. Since a certain number of image spots is transmitted per image line, the pixel clock frequency is higher than the line frequency (H-sync) by the number of these spots.

The three color signals R, B, G of the video signal are fed via a video amplifier VA to analog-to-digital converters ADCR, ADCG and ADCB respectively. The two synchronization signals H-sync and V-sync are conditioned in separate circuits HSY, VSY to the effect that the signal edges eroded by transmission and by various EMC

processes are regenerated once again. The synchronization signals H-sync and V-sync conditioned in this way are then fed to a microprocessor  $\mu P$ . This microprocessor  $\mu P$  measures their frequency and determines therefrom the resolution adjusted in the graphics card of the computer system. The respective data stored on resolution are then transmitted to a phase-locked loop PLL and, parallel thereto, to a logic circuit designed in the form of an ASIC for conditioning and processing of the digital data.

The phase-locked loop PLL multiplies the frequency of the synchronization signal H-sync with the value transmitted to it by the microprocessor  $\mu P$ . Hereby the sampling frequency (pixel clock) is obtained. By virtue of a delay time caused in the phase-locked loop PLL, a phase difference is established between pixel clock and sampling frequency. These two parameters can be influenced via the OSD displays on the monitor. The sampling frequency obtained in the phase-locked loop is also fed to the three analog-to-digital converters ADCR, ADCG, ADCB. These convert the analog data stream into a digital data stream. The digitized data are finally further processed in the downstream logic circuit ASIC by means of data contained in a video memory VM. Whereas in the simplest case the data are transmitted in 1:1 correspondence to the flat-panel display that can be connected to the logic circuit ASIC, the video memory VM is often used to achieve time decoupling between the arriving data and the data to be transmitted to flat-panel display D. Data stored in video memory VM are also accessed for interpolation of lower resolutions.

Fig. 2 shows the horizontal synchronization signal H-sync and a video signal of one channel, for example of a red color channel R. The video signal is selected in such a way in Fig. 2 that bright and dark image spots are displayed alternately. The broken lines on the video signal show the ideal sampling instant or the

ideal phase for digitization of the analog video data. The broken areas on the first two image spots represent the region of the phase which is just still permissible in order that sampling that is still correct can be achieved. After the phase has been matched, it is therefore located on the broken lines. At a resolution of, for example, 1024 x 768 image spots (XGA) and 75 Hz image refresh frequency, a fuzzy and highly grainy display is already obtained at a phase shift of 4 ns. Thus matching of the phase is critical for good image quality.

Fig. 3 shows how the information on phase position that is indispensable for closed-loop control is obtained by determining the ideal sampling instant for shifting the phase. If the phase is determined continuously and the determination of phase position were to be related to the entire image, this would cause considerable image distortions unless additional measures were taken. The image distortions occur because the phase of the pixel clock must be shifted in order to determine the most favorable of the various phase positions. If exclusively the phase of the image zone to be examined, and preferably of one individual image spot, is changed, while all other spots continue to be sampled with unchanged phase, image distortion is not perceptible, since it is limited to this very small zone.

Fig. 3 illustrates several lines of the video signal, wherein the information on the ideal phase is obtained, for example, by the method of automatic phase matching described hereinafter. The two image spots on the basis of which the rising and falling edges are to be determined are the first image spot in line B and the last image spot in line Y, where lines A, B, Y and Z are intended to represent arbitrary image lines. The phase necessary for determination of the ideal sampling instant must be confined to one of these two spots at any given time, whereas all other image

spots continue to be sampled with the current phase adjustment. For this purpose it is merely necessary that the closed-loop control system have access to the data delivered by the analog-to-digital converters and that the phase can be advanced or retarded selectively for a single image spot to be decided by the closed-loop control system.

From the representations in Figs. 4A and 4B it can also be seen that the phase of sampling of the video signal plays a large role for image quality, and that, for different video signals, the phase in many cases must be located at correspondingly different places. Thus Fig. 4A shows a fast video signal with overshoots, wherein the region of sampling between the rising and falling edges of the video signal is relatively narrow and is shifted toward the falling edge. In contrast, Fig. 4B shows a slow video signal without overshoots, wherein the region for sampling between the rising edge and the falling edge is relatively broad and substantially centered. Examination of the two signals shows that they have phase positions, for example on the right side in the region of the falling edge of the slow video signal, in which the measured amplitude values are no longer usable for the slow video signal, whereas amplitude values that are still usable are measured at the same phase position of the fast video signal. On the other hand, it is evident that the ideal phase position is located approximately at the midpoint between the rising and falling edges of the video signal and that it must also be adjusted to this value. Thus it is extremely important to adjust the phase as a function of the respective system.

As already mentioned, automatic phase adjustment is more difficult to achieve than the adjustments of the other parameters. Referring now to the figures, it will be described how such an automatic adjustment can be undertaken.

The starting point for determination of phase position is the edges of the video signals. In order to be able to determine an edge, it is advantageous for this to be as pronounced as possible. This is the case when the signal is as slightly pronounced as possible ahead of the edge and as strongly pronounced as possible after the edge, or vice versa. The first requirement is ideally satisfied by the sampling gap between the back-porch and front-porch regions, and the second is satisfied by a bright image spot. Accordingly, a bright image spot at the beginning of a line is highly suitable for determination of the rising edge and one at the end of a line is highly suitable for determination of the falling edge.

The fact that the edges in question may belong to two different spots, which are possibly located on different image lines, is immaterial, because the pixel clock and sampling clock are known and can be taken into consideration appropriately. The chosen image spots should have sufficiently high intensity in at least one primary color (RGB) that an edge of sufficiently large amplitude is found.

In principle, any combination of one bright and one dark image spot, which can be located at arbitrary places in the video signal, is suitable for determining the edges. In most cases, the sought edges can be determined by the combination of front-porch/back-porch region and one bright image spot in the first/last image column. There is then no need to search through the entire image content for two suitable pairs of spots.

As already illustrated hereinabove, the ideal range for sampling the video signal is that in which specified and actual value of the signal are largely in agreement. Measurement of the amplitude of the video signal in the region of the edge, however, is possible only with difficulty. The reason lies in the jitter of the video signal and of the sampling pulse. If this is coarse



compared with the rise or fall time of the video signal, the edges can indeed be found by averaging several measurements, but information on the amplitude of the edge at the measured place cannot be obtained.

As explained in the foregoing, the sampling values are averaged over several measurements, in order to average out errors caused by jitter. Although 60 new measured values are available when the image frequency is 60 Hz per second and image spot, the reporting of, for example, ten phase values each with ten measured values, would last close to two seconds. To shorten this time, it is possible to consider several spots per phase value and to sample them less often for this purpose. In this way automatic phase matching proceeds more rapidly.

Figs. 6A and 6B illustrate the problem of detecting the edges. Broken lines representing the desired sampling instant are inserted at the ideal video signals. The hatched area represents the region which, due to the jitter, is actually sampled in the various measurements. If the measured values were to be averaged, an average value of about 80% would be obtained in the first case. This averaged value could be incorrectly interpreted as a location on the rising edge and, in fact, precisely at the place at which this has reached 80% amplitude. This is not the case, however. In the second case, the estimate would be 50%, which already is closer to the true situation.

From these results it is clear that, because of jitter, it will hardly be possible to determine the place on the edge at which this has reached a specified value. Under these circumstances, the least error will usually be made by averaging the measured values at about 50% of the specified value. Obviously other values can also be sought. Smaller values, for example, have the advantage that less accuracy is necessary in determination of the actual amplitude of the image spot.

Hereinafter it will be assumed that the image location and the sampling frequency have already been correctly adjusted. In addition, access to the data of the analog-to-digital converters will be supposed to be possible. The rising edge and the falling edge will be determined as follows, for which purpose the following steps will be performed.

#### Rising edge

1. Search for a spot in the first image column which has a sufficiently high, and if at all possible maximal R, G or B value.
2. Since the phase in 1. could have been preadjusted such that the measurement is erroneous, the actual value of the amplitude may be higher. Determine the actual value of the amplitude by a measurement at suitable sampling instant by retarding the phase until the measured amplitude values no longer continue to increase, or by advancing the phase so far at first until the measured amplitude values are very low and this value of the phase, which marks the beginning of the edge, is still retarded by half the pixel width.
3. Shift the phase so far toward the back-porch that the sampling value averaged over several measurements decreases to about 50% of the value determined in 2. Store this value of the phase temporarily, since the rising edge is present here.

#### Falling edge

4. Search for one spot in the last image column which has a sufficiently high and if at all possible maximum R, G and B value. In order to obtain the most accurate possible measured values, the phase should be adjusted, before sampling is performed, to the value found in 2.

5. Shift the phase so far toward the front porch that the averaged sampling value decreases to about 50% of the value determined in 4. The falling edge is located at this point.

Alternatively, the sampling instant can also be found by determining the rising edge of a video pulse of a sufficiently bright image spot, and by adjusting the phase such that the sampling instant is shifted approximately by half the width of an image spot toward the pixel center, or alternatively by determining the falling edge of the video pulse at a sufficiently bright image spot, and by adjusting the phase such that the sampling instant is shifted by approximately half the width of an image spot toward the pixel center. Steps 1 to 5 described hereinabove are then correspondingly simplified.

The ideal sampling instant is theoretically located exactly between the two edges. In practice, it may be advantageous to sample at a slight delay from the midpoint between two edges rather than exactly at such midpoint, in order to keep away from possible overshoots of the graphics card and to allow for the often slightly exponential character of the edges.

Depending on the graphics card being used, it is occasionally advantageous to advance or retard the sampling instant slightly relative to the value determined by matching. For this purpose the device is provided with means which allow the user to change the sampling instant compared with the value determined by matching, in which case an offset adjusted in this way is taken into consideration during automatic matching. Via the OSD, for example, the user can change the sampling instant slightly, and this offset is then taken into consideration by the closed-loop control system.

The hardware of the invention comprises a device which determines the rising edge of a video pulse of a sufficiently bright, a device which determines the falling edge of the video pulse at a sufficiently bright image spot, an adjusting device with which the phase is adjusted such that the sampling instant is located approximately at the midpoint between the rising and falling edges of a video pulse, and a device for shifting the phase for determination of the sampling value of the image spot until the measured amplitude values no longer differ significantly, whereupon the sampling value determined then is further processed.

Furthermore, a device is provided which advances the phase used for determination of the sampling value sufficiently that the measured amplitude values are smaller than a predetermined limit value, such as smaller than 50% of the sampling value, and by a device which then retards the phase by half the width of an image spot, whereupon the sampling value measured then is further processed.

Finally, there are provided a device which shifts the phase for determination of the rising edge sufficiently far toward the back-porch region that the measured amplitude value decreases to a predetermined percentage, such as 50% of the previously determined amplitude value, whereupon this value of the phase is stored temporarily as the position of the rising edge, and a device which shifts the phase for determination of the falling edge sufficiently far toward the front-porch region that the measured amplitude value decreases to a predetermined percentage, such as 50% of the previously determined amplitude value, whereupon this value of the phase is stored temporarily as the position of the falling edge.

According to Fig. 7, an adjusting device for shifting the phase is provided with a circuit containing two PLL circuits PLL1 and

PLL2, whose outputs A1 and A2 can be adjusted independently of one another as regards their phase. The outputs are relayed via a switch S to a common output A. The switch S is an electronic switch, which is operated according to a program.

According to Fig. 8, an adjusting device for shifting the phase is provided with a PLL circuit PLL having two clock outputs A1 and A2, whose output clock signals can be adjusted independently of one another as regards their phase. The two output signals are in turn delivered via a switch S to the output A.

If the one output of the PLL circuit were responsible merely for determination of the ideal sampling phase, whereas the other output of the PLL circuit were to supply the sampling clock for the entire image, the phase determined via the first output would have to be capable of being received at the second output. During reception of the determined ideal phase by the second output, it would be possible for an avoidable error to creep in. In a preferred practical example of the invention, therefore, it is provided that both outputs of the PLL circuit optionally deliver a sampling signal for matching and a sampling signal for the entire image. Thereby the need to receive the phase is eliminated. An electronic changeover unit can decide via the switch S which output is responsible at which instant for which sampling signal. The outputs of the PLL circuit then have the following function, for example, during the closed-loop control process:

Step	Information to be sampled	Sampling pulse arrives from
1.	Edge of the reference spot	Output 1
2.	Remaining image spots	Output 2
3.	Repeat steps 1. + 2. until the ideal phase for output 1 has been determined	
4.	Edge of the reference spot	Output 2

5. Remaining image spots                      Output 1 (with previously determined phase)
6. Repeat steps 4. + 5. until the ideal phase for output 2 has been determined
7. Edge of the reference spot              Output 1
6. Remaining image spots                      Output 2 (with previously determined phase)
9. Repeat steps 7. + 8. until the ideal phase for output 1 has been determined

Repeat steps 4. through 9. cyclically

Against the background that the ideal sampling instant is located  $1/2$  pixel width after the rising edge or before the falling edge of a pixel, an embodiment of the invention that is advantageous from the viewpoint of complexity of construction can be designed such that there is provided a PLL circuit which is programmed in such a way that it oscillates with an integral multiple of the needed sampling frequency. Downstream from the PLL circuit there is then connected a frequency divider, which divides the sampling frequency of the PLL circuit by a factor  $n$ , wherein  $n$  sampling signals phase-shifted by  $1/n$  periods relative to one another can be generated. When  $n = 2$  is selected and when the phase of the PLL circuit is adjusted such that the one output is in phase with one edge of the pixel, the other output supplies a clock which is phase-shifted by  $1/2$  pixel relative to the edge and thus is ideally suitable for sampling. This arrangement enjoys the advantage that it can be made simply and inexpensively since, instead of two PLL circuits, only two digital elements which supply a phase-shifted signal are needed. Since a very narrow zone around the pixel edge must be examined in order to find the correct phase during matching, it is not a serious drawback for practical purposes that the phases are coupled with one another in this case, or in other words the phase of the actual sampling signal is also adjusted during an adjustment of the sampling phase for matching.

Finally, the following information must also be pointed out: As mentioned hereinabove, an image spot whose intensity satisfies certain minimum requirements must be found for determination of the phase. In this connection, it may be advantageous to determine several image spots with intentionally different intensity. Any slight deviations that may be present in the results could then be averaged out.

## New claims

1. A method for correcting the phase difference between the pixel clock of a graphics card and the sampling clock of a flat-panel display with an analog interface in a system comprising flat-panel display, graphics card and computer, characterized in that automatic adjustment of the phase difference is performed repeatedly.
2. A method according to claim 1, characterized in that the automatic adjustment of the phase difference is performed continuously.
3. A method according to claim 1, characterized in that the automatic adjustment of the phase difference is performed periodically.
4. A method according to one of claims 1 to 3, characterized in that the phase-difference adjustment necessary for the instantaneous condition of the system is determined only at individual image spots, and in that the determined phase-difference adjustment is then applied to the entire image.
5. A method according to claim 4, characterized in that a sufficiently bright image spot is selected and the rising edge of a video pulse of this image spot is determined, in that a sufficiently bright image spot is selected and the rising edge of a video pulse of this image spot is determined, and in that the phase difference is adjusted such that the sampling instant for the entire image is situated approximately at the midpoint between the rising and falling edges of the video pulse.
6. A method according to claim 4, characterized in that the rising edge of a video pulse of a sufficiently bright image



spot is determined, and in that the phase difference is adjusted such that the sampling instant is shifted by approximately half the width of an image spot toward the center of the pixel.

7. A method according to claim 4, characterized in that the falling edge of the video pulse is determined at a sufficiently bright image spot, and in that the phase difference is adjusted such that the sampling instant is shifted by approximately half the width of an image spot toward the center of the pixel.

8. A method according to one of claims 5 to 7, wherein the image area and image spots are arrayed on the flat-panel display in rows and columns between a back-porch region and a front-porch region, characterized in that an image spot in the first image column close to the back-porch region is chosen as the sufficiently bright image spot for determination of the rising edge and an image spot in the first image column close to the front-porch region is chosen as the sufficiently bright image spot for determination of the falling edge.

9. A method according to one of claims 5 to 8, characterized in that the brightness of a plurality of image spots of the first or last image column is measured, and the image spots with the greatest brightness in the first or last image column are chosen for determination of the rising or falling edge respectively of the video pulse.

10. A method according to one of claims 5 to 8, characterized in that the image spots ( $n \times k$ ) are first measured with  $n = 1, 2, \dots, N$  and  $k = \text{constant}$ , such as 10, and in that, if no sufficiently bright image spot was found, the image spots  $(n + m) \times k$  are measured with  $m = 1, 2, \dots, N$ , until a sufficiently bright image spot is found.

11. A method according to one of claims 5 to 8, characterized in that, for determination of the amplitude values of the selected image spots, the phase differences at these image spots are shifted until the measured amplitude values no longer change significantly, and in that the amplitude values then determined are further processed.

12. A method according to one of claims 5 to 8, characterized in that the phase difference used for determination of the amplitude values is advanced sufficiently that the measured amplitude values are smaller than a predetermined limit value, for example smaller than 50% of the amplitude value, in that the phase difference is delayed by half the width of a spot, and in that the amplitude value then measured is further processed.

13. A method according to one of claims 5 to 8, characterized in that, for determination of the rising edge of the selected image spots, the phase difference at the selected image spot is shifted sufficiently toward the back-porch region that the measured amplitude value is reduced to a predetermined percentage, for example 50%, of the previously determined amplitude value, and in that this value of the phase difference is stored temporarily as the position of the rising edge.

14. A method according to one of claims 5 to 8, characterized in that, for determination of the falling edge of the selected image spots, the phase difference at the selected image spot is shifted sufficiently toward the front-porch region that the measured amplitude value is reduced to a predetermined percentage, for example 50%, of the previously determined amplitude value, and in that this value of the phase difference is stored temporarily as the position of the falling edge.

ART 34 AMNY

15. A method according to one of claims 5 to 8, characterized in that the phase difference or sampling instant is delayed relative to the midpoint between the rising and falling edges by a predetermined amount, for example 10% of the width of the image spot.

16. A method according to one of the preceding claims, characterized in that the pixel or pixels that is or are influenced or distorted by matching is or are masked by distortion-free image fragments from a video memory.

17. A method according to claim 15, characterized in that the video memory is repeatedly regenerated, preferably with every second image.

18. A method according to one of claims 4 to 17, characterized in that the sampling instant can be changed by the user compared with the value determined during matching, in which case an offset adjusted in this way is taken into consideration during automatic matching.

19. A device for correcting the phase difference between the pixel clock of a graphics card and the sampling clock of a flat-panel display with an analog interface in a system comprising flat-panel display, graphics card and computer, characterized by a device by which automatic adjustment of the phase difference is performed repeatedly.

20. A device according to claim 19, characterized by a device by which automatic adjustment of the phase difference is performed continuously or periodically.

21. A device according to claim 19 or 20, characterized by

an adjusting device for shifting the phase difference, comprising a circuit containing two PLL circuits (PLL1, PLL2), whose outputs (A1, A2) can be adjusted independently of one another as regards their phase difference.

22. A device according to claim 19 or 20, characterized by an adjusting device for shifting the phase difference, comprising a PLL circuit (PLL) with two clock outputs (A1, A2), whose output clock signals can be adjusted independently of one another as regards their phase difference.

23. A device according to claim 22, characterized in that the two outputs (A1, A2) of the PLL circuit (PLL) optionally deliver a sampling clock signal for matching and a sampling signal for the entire image.

24. A device according to claim 23, characterized in that the sampling clock is delivered alternately by the two outputs of the PLL circuit.

25. A device according to one of claims 19 to 25, characterized by a device by which the phase-difference adjustment necessary for the instantaneous condition of the system is determined only at individual image spots, and by which the determined phase-difference adjustment is then applied to the entire image.

26. A device according to one of claims 19 to 25, characterized by a device which determines the rising edge of a video pulse of a sufficiently bright image spot, by a device that determines the falling edge of the video pulse at a sufficiently bright image spot, and by an adjusting device with which the phase difference is adjusted such that the sampling instant is located at approximately the midpoint between the

rising and the falling edges of a video pulse.

27. A device according to one of claims 19 to 26, characterized by a device which determines the rising edge of a video pulse of a sufficiently bright image spot, and by an adjusting device with which the phase difference is adjusted such that the sampling instant is shifted by approximately approximately half the width of an image spot toward the center of the pixel.

28. A device according to one of claims 19 to 26, characterized by a device which determines the falling edge of a video pulse at a sufficiently bright image spot, and by an adjusting device with which the phase difference is adjusted such that the sampling instant is shifted by approximately approximately half the width of an image spot toward the center of the pixel.

29. A device according to one of claims 26 to 28, characterized by a PLL circuit which is programmed such that it oscillates at an integral multiple of the needed sampling frequency, and by a downstream frequency divider, which divides the sampling frequency of the PLL circuit by a factor  $n$ , wherein  $n$  sampling signals phase-shifted by  $1/n$  periods relative to one another can be generated.

30. A device according to claim 29, characterized in that the factor  $n = 2$  is used and, when the phase difference of the PLL circuit is adjusted such that the one sampling signal is in phase with one edge of the pixel, the other sampling signal is shifted by  $1/2$  pixel in its phase difference.

31. A device according to one of claims 19 to 26, characterized by a device for shifting the phase difference

AMT 34 ANDT

for determination of the sampling value of the image spot until the measured amplitude values no longer differ significantly, whereupon the sampling value determined then is further processed.

32. A device according to one of claims 19 to 26, characterized by a device which advances the phase difference used for determination of the sampling value sufficiently that the measured amplitude values are smaller than a predetermined limit value, such as smaller than 50% of the sampling value, and by a device which then retards the phase difference by half the width of an image spot, whereupon the sampling value measured then is further processed.

33. A device according to one of claims 19 to 26, characterized by a device which shifts the phase difference for determination of the rising edge sufficiently far toward the back-porch region that the measured amplitude value decreases to a predetermined percentage, such as 50% of the previously determined amplitude value, whereupon this value of the phase difference is stored temporarily as the position of the rising edge.

34. A device according to one of claims 19 to 26, characterized by a device which shifts the phase difference for determination of the falling edge sufficiently far toward the front-porch region that the measured amplitude value decreases to a predetermined percentage, such as 50% of the previously determined amplitude value, whereupon this value of the phase difference is stored temporarily as the position of the falling edge.


35. A device according to one of claims 19 to 34, characterized by an adjusting device, by which the sampling

instant can be changed by the user compared with the value determined during matching, in which case an offset adjusted in this way is taken into consideration during automatic matching.

1999P1524

1/4

FIG 1

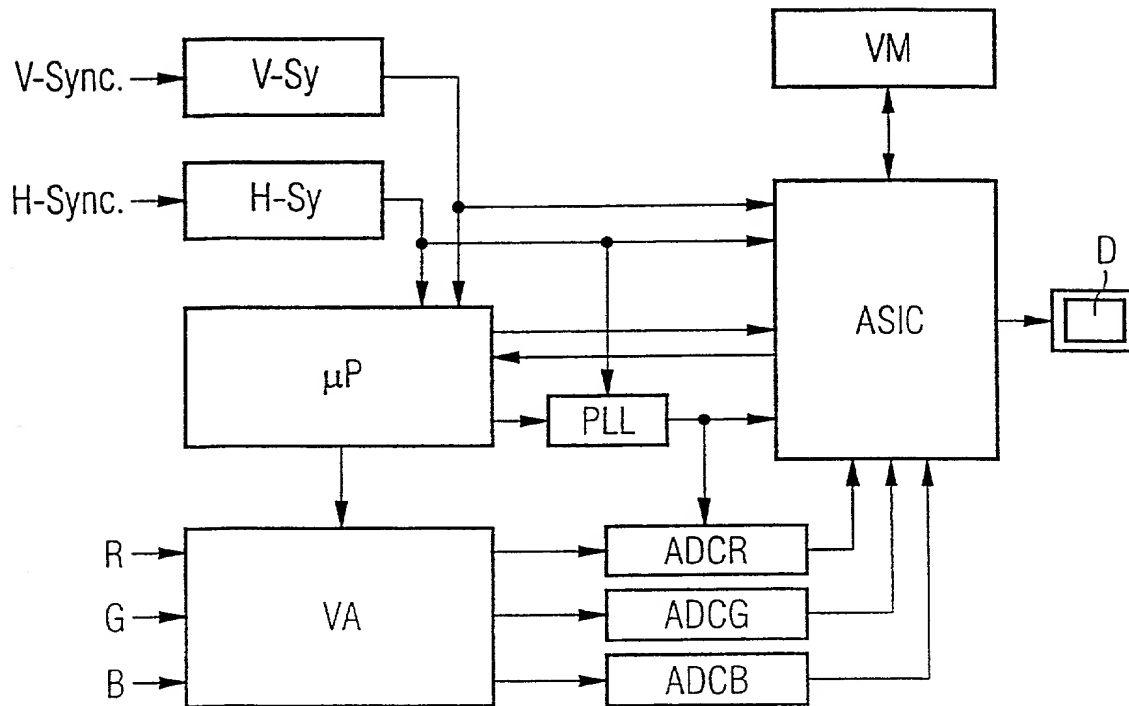



1999P1524

2/4

FIG 2


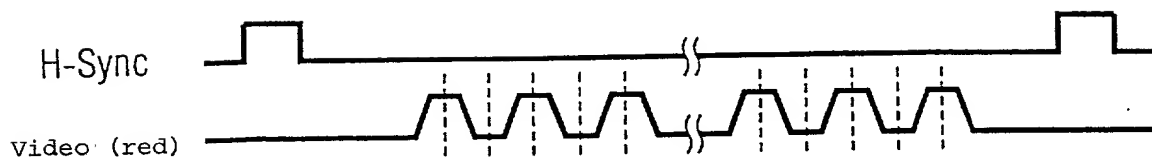


FIG 3

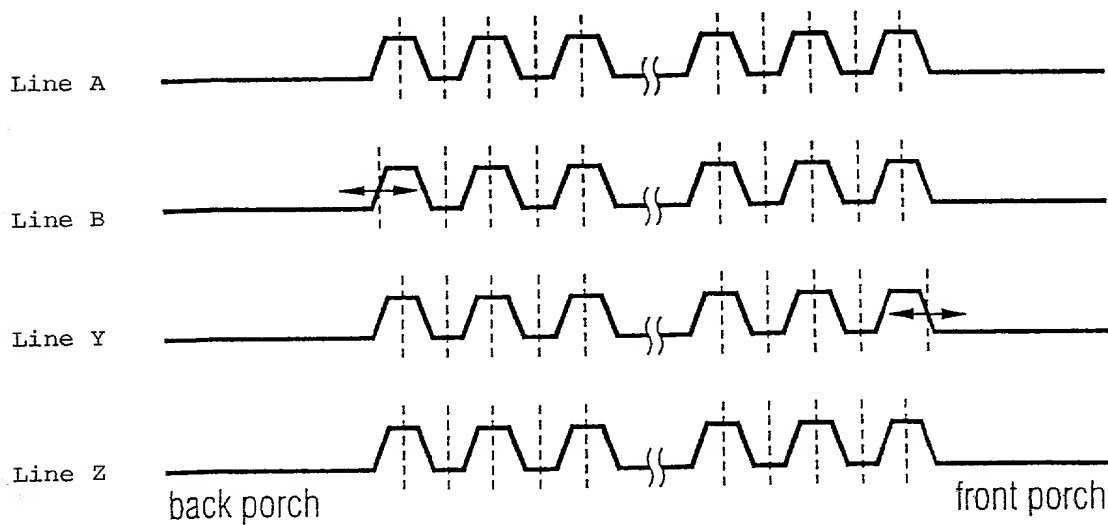

3/4

FIG 4A

Fast Video Signal with  
Overshoot

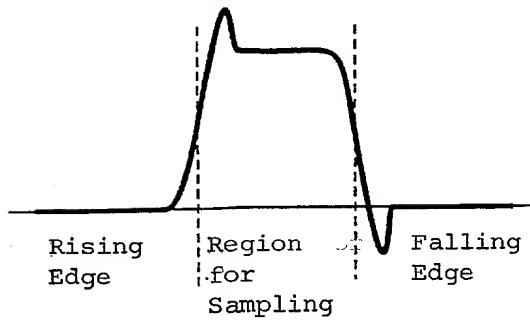


FIG 4B

Slow Video Signal

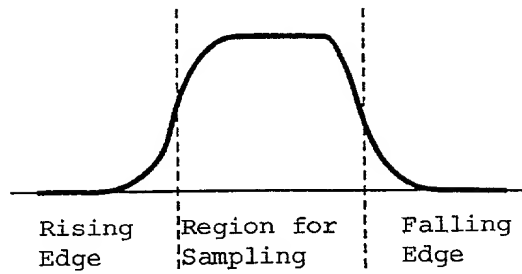


FIG 5

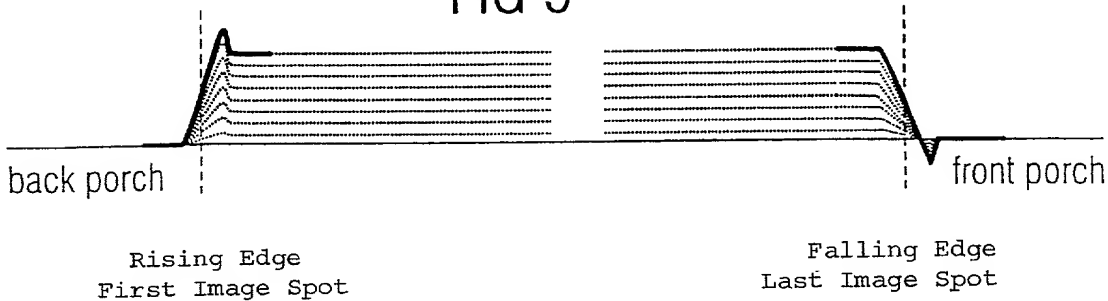


FIG 6A

Ideal Video Signal


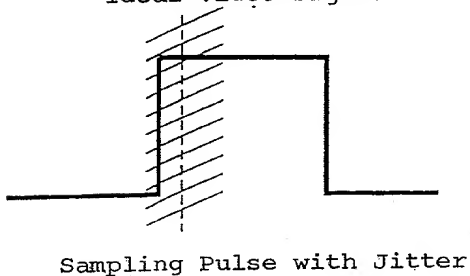


FIG 6B

Ideal Video Signal

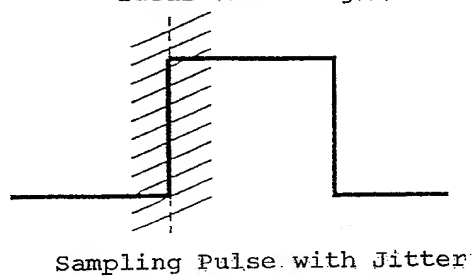

4/4

FIG 7


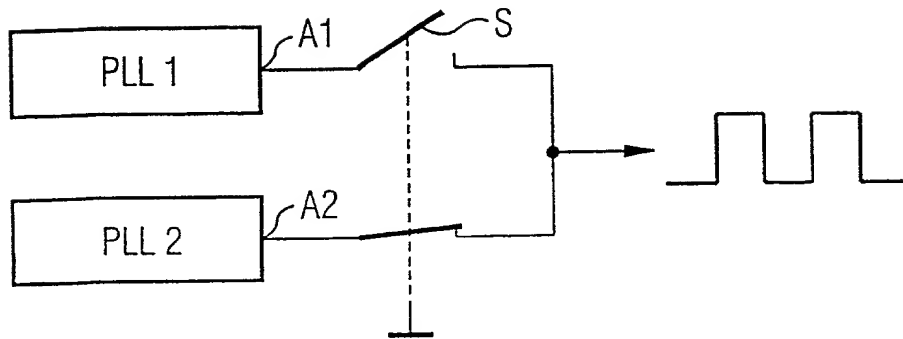


FIG 8

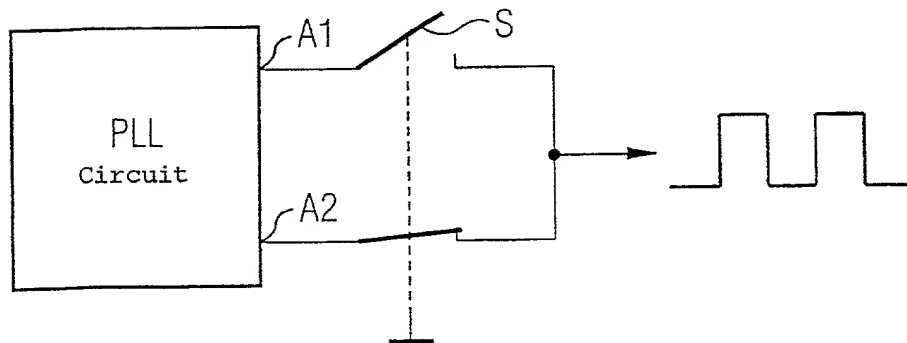

# Declaration and Power of Attorney for Patent Application

## Erklärung für Patentanmeldungen mit Vollmacht

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

daß mein Wohnsitz, meine Postanschrift und meine Staatsangehörigkeit den im nachstehenden nach meinem Namen aufgeführten Angaben entsprechen, daß ich nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent für die Erfindung mit folgendem Titel beantragt wird:

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

deren Beschreibung:

☐ ist beigefügt

☐ wurde angemeldet am \_\_\_\_\_

unter der US-Anmeldenummer oder unter der Internationalen Anmeldenummer im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT)

\_\_\_\_\_ und am

\_\_\_\_\_ abgeändert (falls zutreffend).

Ich bestätige hiermit, daß ich den Inhalt der oben angegebenen Patentanmeldung, einschließlich der Ansprüche, die eventuell durch einen oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und verstanden habe.

Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37, Code of Federal Regulations, § 1.56 von Belang sind.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND DEVICE FOR ADJUSTING THE

PHASE FOR FLAT SCREENS (as amended)

the specification of which:

☐ is attached hereto.

☒ was filed on 16 March 2000

as United States Application Number or PCT International Application Number

PCT/DE00/00819 and was amended on

\_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

## German Language Declaration

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title 35, US-Code, § 119(a)-(d), bzw. § 365(b) aller unten aufgeführten Auslandsanmeldungen für Patente oder Erfinderurkunden, oder § 365(a) aller PCT internationalen Anmeldungen, welche wenigstens ein Land ausser den Vereinigten Staaten von Amerika benennen, und habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen für Patente bzw. Erfinderurkunden oder PCT internationale Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung, für welche Priorität beansprucht wird, vorangeht

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below, and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior foreign application(s)  
(Frühere ausländische Anmeldungen)

Priority claimed

Priorität  
beansprucht

<u>199 13 916.4</u>	<u>GERMANY</u>
(Number)	(Country)
(Nummer)	(Land)
<u>199 40 384.8</u>	<u>GERMANY</u>
(Number)	(Country)
(Nummer)	(Land)

<u>26 March 1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Day/Month/Year Filed)	Yes	No
(Tag/Monat/Jahr der Anmeldung)	Ja	Nein
<u>25 August 1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Day/Month/Year Filed)	Yes	No
(Tag/Monat/Jahr der Anmeldung)	Ja	Nein

Ich Beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(Aktenzeichen)

(Filing Date)  
(Anmeldetag)

(Application No.)  
(Aktenzeichen)

(Filing Date)  
(Anmeldetag)

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

PCT/DE00/00819

16 March 2000

(Application No.)  
(Aktenzeichen)

(Filing Date)  
(Anmeldetag)

(Status) (patented, pending, abandoned)  
(Status) (patentiert, schwebend, aufgegeben)

(Application No.)  
(Aktenzeichen)

(Filing Date)  
(Anmeldetag)

(Status) (patented, pending, abandoned)  
(Status) (patentiert, schwebend, aufgegeben)

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachten Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und daß derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patentes gefährden können

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## German Language Declaration

**VERTRETUNGSVOLLMACHT** Als benannter Erfinder beauftrage ich hiermit den (die) nachstehend aufgeführten Patentanwalt (Patentanwälte) und/oder Vertreter mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Angelegenheiten vor dem US-Patent- und Markenamt (*Name(n) und Registrationsnummer(n) auflisten*)

**POWER OF ATTORNEY.** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (*list name and registration number*)



**022850**

Postanschrift.

Send Correspondence to:



**022850**

Telefonische Auskünfte:  
(*Name und Telefonnummer*)

Direct Telephone calls to. (*name and telephone number*)

(703) 413-3000

Vor- und Zuname des einzigen oder ersten Erfinders		Full name of sole or first inventor	
1-0		Paul VON HASE	
Unterschrift des Erfinders	Datum	Inventor's signature	Date
		Paul v. Hase	August 17, 2001
Wohnsitz	GRIECHENSTRASSE 13	Residence	<del>Willi Steier Strasse 11, D-86159</del>
	81545 MUENCHEN		Augsburg, Germany
Staatsangehörigkeit	DEX	Citizenship	Germany
Postanschrift		Post Office Address	same as above
Vor- und Zuname des zweiten Miterfinders (falls zutreffend)		Full name of second joint inventor, if any	
Unterschrift des zweiten Erfinders	Datum	Second inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	

(Im Falle dritter und weiterer Miterfinder sind die entsprechenden Informationen und Unterschriften hinzuzufügen.)

(Supply similar information and signature for third and subsequent joint inventors.)